

Mirafi® 500X

for Interlocking Concrete Paver Stabilization

PRODUCT DESCRIPTION


Mirafi® 500X is a woven geotextile comprised of UV stabilized polypropylene slit film. Mirafi® 500X provides excellent puncture and tear resistant properties in addition to high tensile strengths.

FEATURES AND BENEFITS

- **Construction.** Woven construction offers excellent resistance to installation abuse.
- **Strength.** High modulus provide outstanding performance in a wide range of applications.
- **Flow.** Uniform openings provide filtration and flow characteristics.
- **Cost.** Mirafi® 500X geotextiles were developed to improve the economics and performance of roadway and concrete paver systems by increasing the design life and reducing the maintenance cost, preventing periodic overstressing of the subgrade, and eliminating costly project delays by allowing all-weather construction.

APPLICATIONS

The use of Mirafi® 500X increases the stability of the base material. The geotextile allows for drainage but retains and separates the soil above to stop subgrade material from contaminating the base material. Mirafi® 500X prevents the compacted base course from pushing into the subgrade. Mirafi® 500X is recommended as a separator in all paver applications, but specifically in clay soil applications.

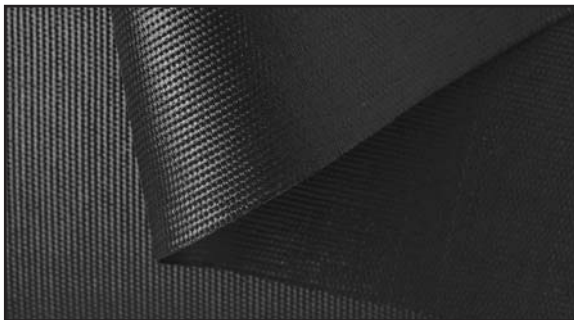

Mirafi® 500X Woven Slit Film Geotextile

Mirafi® 140N

for Subsurface Drainage

PRODUCT DESCRIPTION

Mirafi® 140N is a nonwoven geotextile comprised of polypropylene staple fibers. Mirafi® 140N provides excellent physical and hydraulic properties in addition to high tensile strengths.


FEATURES AND BENEFITS

- **Construction.** Mirafi® 140N easily conforms to the ground or trench surface for trouble-free installation.
- **Strength.** Mirafi® 140N withstands severe installation stresses with high puncture and burst resistance.
- **Filtration.** High permeability properties provide high water flow rates while providing excellent filtration properties.
- **Cost effective.** Mirafi® 140N geotextiles provide economical solutions to many civil engineering applications including a cost-effective alternative to graded-aggregate filters.

APPLICATIONS

Mirafi® 140N is used in a wide variety of applications including separation, filtration, and protection applications.

Lightweight nonwovens are predominantly used for subsurface drainage applications along highways, within embankments, under airfields, and athletic fields. For these drainage structures to be effective, they must have a properly designed protective filter. Mirafi® 140N provides filtration to retain soil particles and allow water to flow into the drainage system.

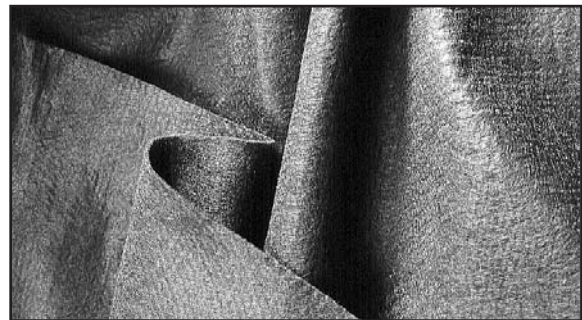

Mirafi® 140N Nonwoven Geotextile



Mirafi® 500X

for Interlocking Concrete
Paver Stabilization


Property / Test Method	Unit	500X	
MECHANICAL PROPERTIES			
Grab Tensile Strength			
ASTM D 4632			
Strength @ Ultimate	kN (lbs)	0.90 (200)	
Elongation @ Ultimate	% MD/ CD	15/ 10	
Mullen Burst Strength			
ASTM D 3786	kPa (psi)	2756 (400)	
Trapezoidal Tear Strength			
ASTM D 4355	kN (lbs)	0.33 (75)	
Puncture Strength			
ASTM D 4833	kN (lbs)	0.40 (90)	
UV Resistance after 500 hrs.	% strength	70	
ASTM D 4355			
HYDRAULIC PROPERTIES			
Apparent Opening Size (AOS)			
ASTM D 4751	US Sieve	50	
	mm	0.30	
Permittivity			
ASTM D 4491	sec ⁻¹	0.05	
Flow Rate			
ASTM D 4491	l/min/m ² (gal/min/ft ²)	200 (5.0)	
Packaging	Units	POP Bags	Commercial Pack
Roll Width	m(ft)	1.8 (6.0)	3.8 (12.5)
Roll Length	m(ft)	30.4 (100)	132 (432)
Est. Gross Weight	kg(lbs)	11.3 (25)	95 (210)
Area	m ² (yd ²)	54.7 (66.6)	502 (600)
Rolls per pallet	-	60	-



Mirafi® 140N

for Subsurface Drainage

Property / Test Method	Unit	140N	
MECHANICAL PROPERTIES			
Grab Tensile Strength			
ASTM D 4632			
Strength @ Ultimate	kN (lbs)	0.53 (120)	
Elongation @ Ultimate	%	50	
Mullen Burst Strength			
ASTM D 3786	kPa (psi)	1550 (225)	
Trapezoidal Tear Strength			
ASTM D 4355	kN (lbs)	0.22 (50)	
Puncture Strength			
ASTM D 4833	kN (lbs)	0.30 (65)	
UV Resistance after 500 hrs.	% strength	70	
ASTM D 4355			
HYDRAULIC PROPERTIES			
Apparent Opening Size (AOS)			
ASTM D 4751	US Sieve	70	
	mm	0.212	
Permittivity			
ASTM D 4491	sec ⁻¹	1.8	
Flow Rate			
ASTM D 4491	l/min/m ² (gal/min/ft ²)	5500 (135)	
Packaging	Units	POP Bags	Commercial Pack
Roll Width	m(ft)	0.9 (3)	3.8 (12.5)
Roll Length	m(ft)	30.4 (100)	110 (360)
Est. Gross Weight	kg(lbs)	4.5 (10)	67 (148)
Area	m ² (yd ²)	27.3 (33.3)	418 (500)
Rolls per pallet	-	25	-



www.mirafi.com

WARRANTY

MIRAFI® Construction Products assumes no liability for the accuracy or completeness of this information or for the ultimate use by the purchaser. MIRAFI® disclaims any and all express, implied, or statutory standards, warranties or guarantees, including without limitation any implied warranty as to merchantability or fitness for a particular purpose or arising from a course of dealing or usage of trade as to any equipment, materials, or information furnished herewith. This document should not be construed as engineering advice.

PDS.500x140n.0304

CORPORATE OFFICE

365 South Holland Drive • Pendergrass, GA 30567
(888) 795-0808 • (706) 693-2226 • Fax (706) 693-4400



Ten Cate Nicolon